


PROGRESSIVE CAVITY PUMPS

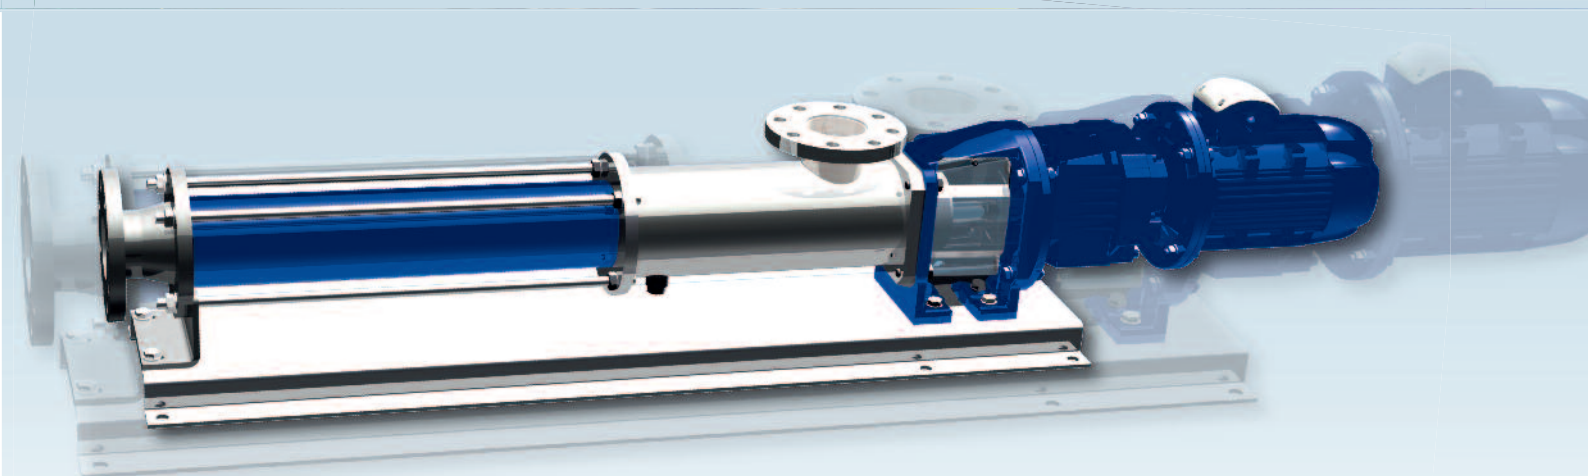

innovation > technology > future

Main technical features of progressing cavity pumps

“Cavity Progressive” Screw Pumps: Volumetric Rotary and Self-Priming Pumps

The pump features a uniform flow rate proportional to the number of revolutions, as well as small size. This allows pumping the product without pulsations but also to keep it unaltered and undamaged. The pump is self-priming, with suction capacity proportional to its size, number of stages and speed. **Minimum suction is 4 m.W.C.**

The pump can work with a wide range of fluids. These can contain gases, abrasives, fibers and solids within the liquid matrix.

The Screw Pump characteristics include:

- Pumping and dosing high or low viscosity liquids up to 1.000.000 cps;
- Pulse-free pumping with minimum tensile strain on the processed product;
- High pumping pressure (6 bar per stage);
- The pumps are available in single or multi-stage versions, depending on the required pressure.

Pump component

1 ROTOR

It's a screw shape with circular section that rotating in to the stator, allows the pumping of the fluid. The pressure of the pump depends on the number of stages.

Every stage gives a pressure of 6 bar. We have two types of rotors: standard and long step type that, considering the same diameter and eccentricity, doubles the capacity increasing the pump performance.

Materials: AISI 304; AISI 316; AISI 420B

2 STATOR

It is the fixed made in vulcanized rubber, contained or less on the metal tube, shaped like a circular screw quarry where the rotor rotates.

Maximum working temperature up to 150 °C.

Rubber type: NBR

3 TRANSMISSION AND JOINT

Withstand the axial and torque and torque stress between rotor connection and driver.

Rubber type: AISI 304; AISI 316

Tips: Pin joint

4 PUMP BODY

It's the structure where the liquid is pumped from. Available with a lot of connection types.

Materials: Cast iron G25 UNI 5007; AISI 304 / 316

5 COUPLING

Possible coupling types are: close coupled, bearing housing, stainless steel support.


6 SEAL

It's the connection between the fix part and the rotating part of the pump to avoid the exit of the fluid.

The selection of the type is depending by the fluid to pump

7 MOTORIZATION



These are the devices that give the movement to the pump: motor, hand variator, gear reducer, inverter.

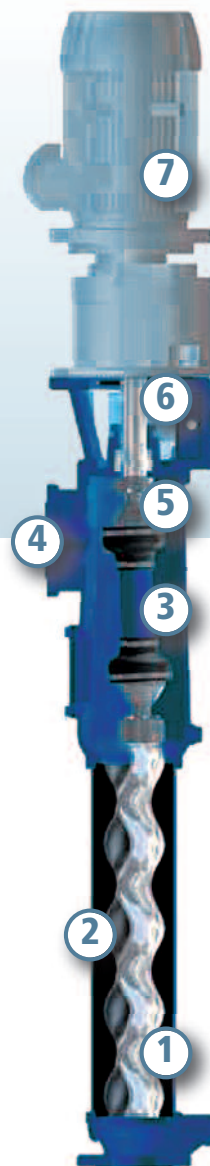

Products Range

F SERIES Designed with new technology for "reversible flow"

CN SERIES Suitable for the dosing of various liquid products.

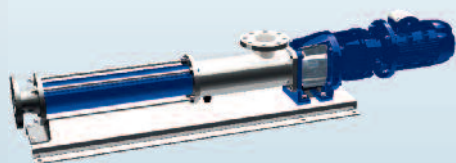

Application Fields

Sewage treatment

Dirty waste water, primary, secondary, digested, dewatered sludge, flocculants, lime milk.

Fish industry

Waste, interiors, flour, minced fish, vegetal oil, fish oil, water mix with blood.

Chemical and petrochemical industry

Resin, reagent, sulphate, caustic soda, acids, crude oil sludge, biodiesel.

Marine

Oil sludge, bilge water, sea water.

Paper industry

Paper paste, cellulose, glue, pulps, patinas, starch.

Mining

Mining waste water, sludge, lime milk.

Construction

Mortar, coat, cement, concrete.

Ceramic industry

Porcelain mix, clay sludge, lime.

Cosmetic industry

Soap, cream, tooth-paste, shampoo, detergent.

Winery

Grapes, must, grape paste, wine.

Beverage

Fruit juice pulp, liquors, beer, fruit paste.

Oil industry

Oil, olive mass.

Agriculture and biotechnology

Fodder, manure, corn, wheat.

Pastry and bakery

Flour, dough, sponge cake, caramel, chocolate, creams, honey, jam.

Food industry and dairy

Tomatoes, pulp fruit, vegetable, honey, milk products.

Slaughterhouse


Minced meat, blood, bones and meat mix.

Paint and coat industry

Colour, solvent, ink paste, pigment, paint.

Sugar industry

Product derivatives by beet and sugar cane, glucose, treacle, alcohol, ethanol.



F SERIES

seko presents its range of progressing cavity pumps.

Studied and designed to increase the performance.

These pumps are completely reversible.

Available a wide pumps range.

Hopper Version available, completed with feeding conveyor for pumping fluid with high viscosity and solid in suspension (about to 17%)



Compact design and good quality/price ratio

Easy to install thanks to the compact design

- Single stage stator with long pitch geometry to improve performance
- Reversible flow: standard up to 3 bar, with hydraulic balance can be increased up to 12 bars
- Compact Joint with geometry and dimensions designed to ensure the maximum suction capacity
- To ensure minimal wear, the transmission shaft is completed with a universal pin joint, bushing and transmission guides to ensure high reliability and long life
- Rubber sleeves designed to increase working life in case of sharp solids in the fluids
- Easy Maintenance. Fewer wearing components, small-sized by design

- The concept of universal joint design is the same for all pumps. The dimension and material selected according to the application
- Standard rotating parts are made in Stainless Steel. Other materials available
- The section between stator and pump body is designed to increase priming of the pump
- The standard version has a single mechanical seal. The pumps are designed to install a wide range of mechanical seal solutions: packing seal, double mech.seal and cartridge
- Modular bearing housing with taper roller bearings and blocking nut to set the preload
- Compact dimensions allow easy bearing maintenance
- Efficient integrated lubrication system

VERSIONS

Cast iron

Body pump / outlet flange: cast iron G25

- Inspection ports standard in all the sizes cast iron
- Available connection: Flanges DIN 2501; Flanges ANSI RF150; Spherical connections

Stainless steel

Body pump / outlet flange: AISI 304 / 316

- CIP on request
- Available connections: BSP (Gas); Flanges DIN 2501; Flanges ANSI RF150; DIN 11851; SMS; RJT (BMS); Macon; Clamp; Other if requested


Hopper / outlet flange: AISI 304 / 316

- CIP on request
- Available connections: BSP (Gas); Flanges DIN 2501; Flanges ANSI RF150; DIN 11851; SMS; RJT (BMS); Other if requested

SHAFT AND PIN JOINT

The Transmission joint with stands the axial stress and torque between the rotor connection and the drive. They are completely reversible. **Materials** : AISI 304; AISI 316



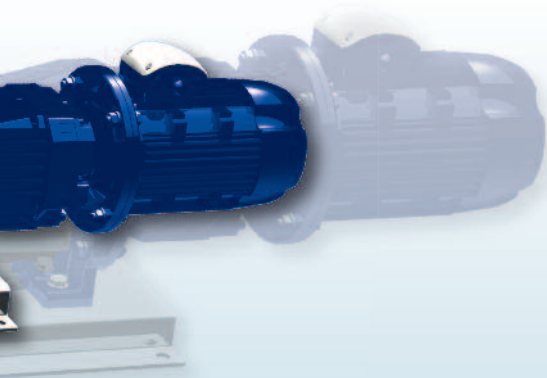


MOTOR COUPLING	Close Coupled Type “FS - FT”		<div>■ Flange diam. 160 / 200 / 250 / 300 mm related to the pumps sizes</div> <div>■ Female drive shaft AISI 304 / AISI 316 / AISI 420B</div> <div>■ Diam. 24 /30 /35 /40 /50 mm related to the pumps sizes</div>		
	Close Coupled Type “FN - FH”		<div>■ Flange diam. 160 / 200 / 250 / 300 mm related to the pumps sizes</div> <div>■ Female drive shaft AISI 316 / carbon steel with crome (HCP)</div> <div>■ Diam. 19 / 24 / 25 / 28 / 30 / 32 / 35 / 40 mm related to the pumps sizes</div>		
BEARING HOUSING	<div>■ FLEXIBLE JOINT TYPE “S” [FS]</div> <div>■ FLEXIBLE JOINT TYPE “T” [FT]</div>				
PRODUCTS LINE (WITH HAND VARIATOR*)	MODELS	FLOW RATE	PRESSURE	MOTOR POWER	
	FN 02 2V8	0,6÷2,8 m³/h	2 bar	1,5 kW	
	FN 02 005	1÷5 m³/h	2 bar	1,5 kW	
	FN 04 005	1÷5 m³/h	4 bar	2,2 kW	
	FN 08 2V5	0,5-2,5 m³/h	8 bar	2,2 kW	
	FN 08 005	1÷5 m³/h	8 bar	3 kW	
	FN 02 010	2÷10 m³/h	2 bar	2,2 kW	
	FN 04 010	2÷10 m³/h	4 bar	3 kW	
	FN 08 010	2÷10 m³/h	8 bar	4 kW	
	FN 03 020	4÷20 m³/h	3 bar	4 kW	
	FN 02 026	5÷26 m³/h	2 bar	4 kW	
	FN 04 040	8÷40 m³/h	4 bar	7,5 kW	
	FN 02 060	12÷60 m³/h	2 bar	11 kW	
	TYPES AVAILABLE	N	■ FLANGED		
H		■ HOPPER			

(*) Gear reducer (FIX FLOW) available on request

CN SERIES

The dosing pump with small capacities, continuous flow, low pulsations, no vibrations, very high priming capacity and flow reversibility.

It's suitable to pump precisely medium liquid, dense, viscous, with solid parts on suspension.

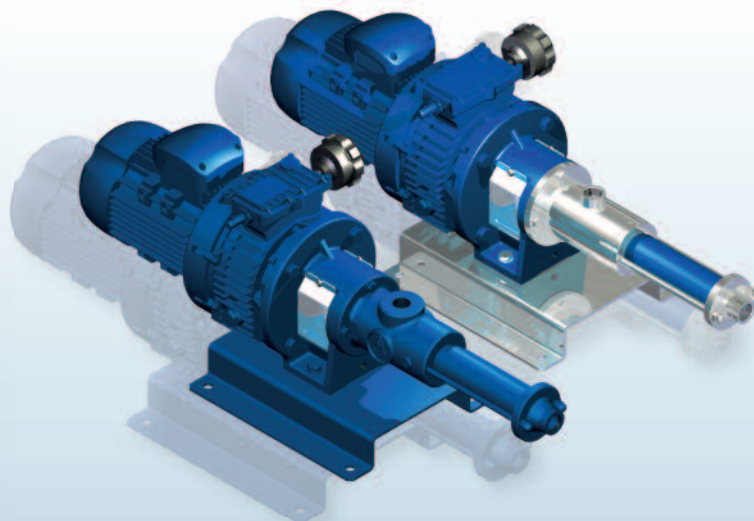

VERSIONS	Cast iron	Body pump / outlet flange: cast iron G25 <ul style="list-style-type: none"> ■ Inspection ports standard in all the sizes ■ Available connection: Flanges DIN 2501; Flanges ANSI RF150; Spherical connections 			
	Stainless steel	Body pump / outlet flange: AISI 304 / 316 <ul style="list-style-type: none"> ■ CIP on request ■ Available connections: BSP (Gas); Flanges DIN 2501; Flanges ANSI RF150; DIN 11851; SMS; RJT (BMS); Macon; Clamp; Other if requested 			
MOTOR COUPLING	Close Coupled Type "CN"	<ul style="list-style-type: none"> ■ Flange diam. 160 / 200 / 250 / 300 mm related to the pumps sizes ■ Female drive shaft AISI 316 / carbon steel with chrome (HCP) ■ Diam. 19 / 24 / 25 / 28 / 30 / 32 / 35 / 40 mm related to the pumps sizes 			
PRODUCTS LINE (WITH HAND VARIATOR*)	MODELS	FLOW RATE	PRESSURE	MOTOR POWER	
	CN 08 060	12÷60 l/h	8 bar	0,37 kW	
	CN 16 030	6÷30 l/h	16 bar	0,37 kW	
	CN 08 150	30÷150 l/h	8 bar	0,37 kW	
	CN 02 650	150÷650 l/h	2 bar	0,55 kW	
	CN 08 650	150÷650 l/h	8 bar	0,75 kW	
	CN 02 16H	300÷1600 l/h	2 bar	0,75 kW	
	CN 02 10H	200÷1000 l/h	2 bar	0,55 kW	
	CN 02 30H	600÷3000 l/h	2 bar	1,1 kW	

(*) Gear reducer (FIX FLOW) available on request

Accessories




PROBE AND THERMOREGULATOR

Dry running of our pumps causes damages to stator making it destroyed. Pump working without liquid inside makes internal temperature sharply increasing. That increase is relieved by the thermal probe which, when installed on the pumps, stops the pumping and avoid the stator going burned.



BASE PLATE

This equipment is built with omega profile in order to get strong resistance to any shock, mechanical stress, weight. Easy fixation of the pump through fitted holes. For bearing housing pumps, the baseplate is requested for the correct alignment between pump and motor group.

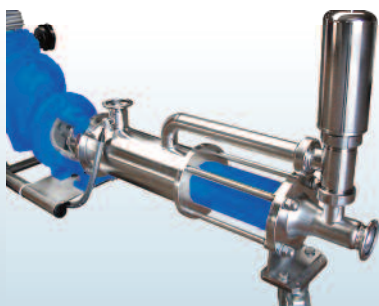

BY-PASS

In order to avoid problems of overpressure in the discharge branch, a safety valve may be applied on the pump, connected to a circuit called "by-pass" automatically driven when the working pressure goes over the set up safety level.



TROLLEY

This is a solution for the all that applications requesting several different displacements of pump or just to help the maintenance moving the pump placed under some installation.

A Worldwide Group at your service

seko has been a significant manufacturer of metering pumps and dosing systems for over 40 years. This long activity allowed seko to acquire a vast experience in diversified applications and to confirm its international success in many industrial fields through the supply of reliable solutions for the dosing, injection and transfer of liquids

Today **seko** is an International Group, developing, manufacturing and delivering its products in more than 50 countries, through its 15 subsidiaries and an extended network of distributors, agents and authorized dealers



BRAZIL

Seko do Brasil Comercio de Sistemas de Dosagem Limitada

03170-050 São Paulo (SP)
Phone: +55 11 2606 9878
Fax: +55 11 2606 9878
sekobrasil@sekobrasil.com.br
www.sekobrasil.com.br

CHINA

Seko China Ltd

072750 Hebei
Phone: +86 312 552 0904
Fax: +86 312 552 0901
china@seko.com
www.sekochina.com

DENMARK

Seko Denmark

DK-4930 Maribo
Phone: +45 5475 7545
Fax: +45 5474 7545
info@seko.com

FRANCE

Seko Lefranc-Bosi S.A.

77435 - Marne La Vallée Cedex 2
Phone: +33 1 6005 9060
Fax: +33 1 6480 4104
lefrancbosi@lefrancbosi.com
service.commercial@seko.fr
www.lefrancbosi.com

GERMANY

Seko Deutschland GmbH

55252 Mainz - Kastel
Phone: +49 6134 2858 10
Fax: +49 6134 2858 29
info@seko-messtechnik.de
www.seko-germany.com

ITALY

Seko Spa

Via Salaria Km. 92,200
02010 S.Rufina - Rieti
Phone: +39 0746 605801
Fax: +39 0746 607072
sales@seko.com

Seko Spa

[Process & Sytems]

Via Di Vittorio, 25 - 20068
Peschiera Borromeo - Milano
Phone: +39 02 97372411
Fax: +39 02 55301744
info.psd@seko.com
info@seko.com

ROMANIA

Seko Sieta S.r.l.

400393 Cluj-Napoca
Phone: +40 264 415 251
Fax: +40 264 415 622
info.dpro@seko.com

RUSSIA

000 Seko

129347 - Moscow
Phone: +74 99 182 52 36
Fax: +74 99 182 52 36
sekorussia@seko.com
www.sekorussia.ru

SINGAPORE

Seko Dosing Systems Asia Pacific Pte Ltd

608838 Singapore
Phone: +65 6515 6996
Fax: +65 6515 5079
asiapacific@seko.com

SOUTH AFRICA

Seko Southern Africa (PTY) Ltd

Kyasand - Johannesburg - Gauteng
Phone: +27 11 704 6589
Fax: +27 11 704 6588
sales@sekosa.co.za

SPAIN

Seko Ibérica Sistemas de Dosificación S.A.

08960 Sant Just Desvern - Barcelona
Phone: +34 93 4802 570
Fax: +34 93 4802 571
sekoiberica@sekoiberica.com

SWEDEN

Seko Sweden

26123 Landskrona
Phone: +46 418 448 482
Fax: +46 418 448 483
info@seko.com

TURKEY

Seko Endüstriyel Pompalar ve Proses Sistemleri San. ve Tic. Ltd. Şti.

Kartal İstanbul
Phone: +90 216 353 2542
Fax: +90 216 353 1450
info@seko.com.tr
www.seko.com.tr

UAE

Seko Middle East FZE

P.O. Box 42090 - Hamriyah Free Zone, Sharjah
Phone: +971 65264982
Fax: +971 65264983

UNITED KINGDOM

Seko UK - Chemical Controls Ltd

Harlow, Essex - CM19 5JH
Phone: +44 1279 423550
Fax: +44 1279 423993
seko.uk@seko.com
www.sekouk.com

USA

Seko Dosing Systems Corporation USA

Tullytown - PA 19007
Phone: +1 215 945 01 25
Fax: +1 215 945 09 37
sales@sekousa.com
www.sekousa.com

For more information

www.seko.com

